


Quality Features

- Full traceability for all components used in manufacturing process
- Chain links are embossed with manufacturer's mark and batch number every 20 links or 1m which ever is the lesser
- Every Master Link embossed with cromox and our traceability Batch Number
- All assemblies are Proof Load Tested to 2.5 x W.L.L.
- Factor of Safety: 4 : 1
- Full certification supplied with every sling in accordance with Machinery Directive 2006 / 42 / EC

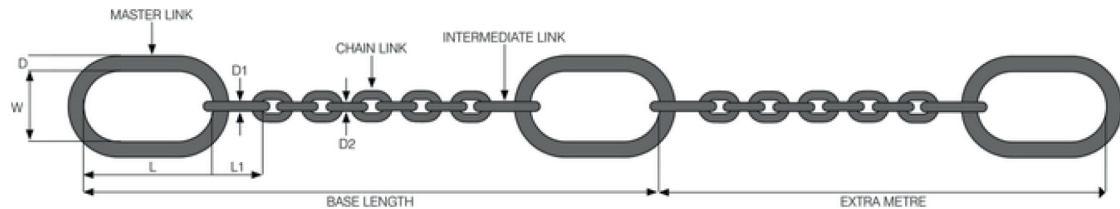

Finish: Polished Proof Tested and Certified Proof Load 2.5 x W.L.L. F.O.S. 4 : 1

Part Code	Chain Dia. (mm) D2	D1 mm	L1 mm	D mm	L mm	W mm	W.L.L. Tonnes	Weight Per M Kg
SS-CPK05063	5*	6	26	10	80	50	630 Kg	0.65
SS-CPK07125	7*	8	35	13	110	60	1.25	1.37
SS-CPK09200	9*	10	44	16	110	60	2.0	2.34
SS-CPK13385	13	16	70	22	160	90	3.85	4.12
SS-CPK16500	16**	18	85	22	160	90	5.0	5.04
SS-CPK18700	18**	22	115	26	180	100	7.0	6.94