


- Fatigue Rated x 1.5 WLL for 20,000 cycles
- Proof Tested - 2.5 times Working Load Limit
- 100% Magnaflux Crack Detected
- Super Alloy Steel

XN085

Eye Shortening Grab Hook

- EN1677-1.
- Safety Factor 4:1

Part Code	Size (mm)	Weight (kg)	WLL (T)	E	D	H	R	L
XN085-06	6	0.14	1.12	8	14.5	16	46.8	70.8
XN085-07/8	7/8	0.245	2	10.8	18	20	61.5	91.2
XN085-10	10	0.65	3.15	13	20	29	80	122
XN085-13	13	1.39	5.3	16.5	26	42.8	99.7	158
XN085-16	16	2.2	8	19	30.5	45	106	169
XN085-20	18/20	4.6	12.5	24	37.5	56	140	219
XN085-22	22	8.2	15	28	44	68	165	259
XN085-26	26	9.8	21.2	30	49	77	197	306
XN085-32	32	19.4	31.5	38	57	95	226	361

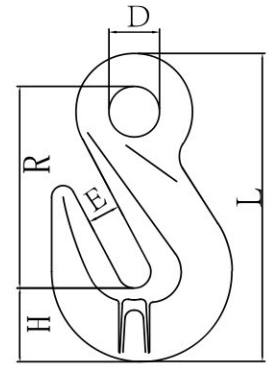


XN317

Eye Shortening Grab Hook with Safety Pin

- EN1677-1.
- Safety Factor 4:1

Part Code	Size (mm)	Weight (kg)	WLL (T)	M	B	D	E	L
XN317-07/8	7/8	0.29	2	17	50	9.5	11	88.5
XN317-10	10	0.75	3.15	20	71	13	13	121.5
XN317-13	13	1.62	5.3	26	96	15.5	16.5	158

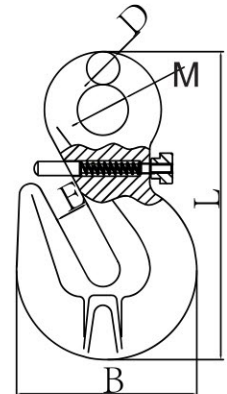

XN141

Deep Throat Eye Grab Hook

- EN1677-1.
- Safety Factor 4:1

Part Code	Size (mm)	Weight (kg)	WLL (T)	D	E	B	R	L
XN141-06	6	0.16	1.12	15	7	45	56	83
XN141-07/8	7/8	0.35	2	16	9.6	52	75.3	106.5
XN141-10	10	0.75	3.15	21	13	66	84.5	124.5

