


- Fatigue Rated x 1.5 WLL for 20,000 cycles
- Proof Tested - 2.5 times Working Load Limit
- 100% Magnaflux Crack Detected
- Super Alloy Steel
- All Load Pins are 100% individually inspected and tested

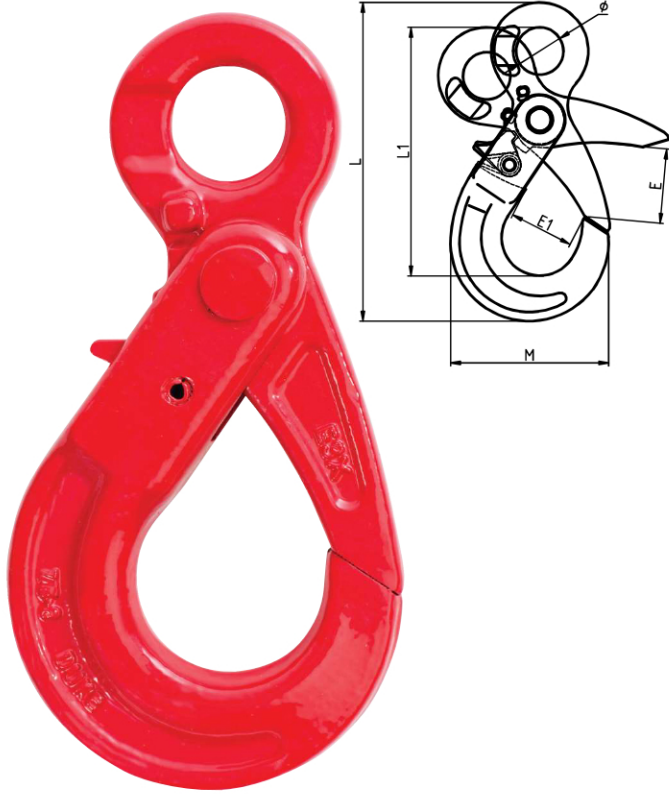

## XN737

Eye Self Locking Hook

## XN739

Clevis Self Locking Hook

- EN1677-3.
- Safety Factor 4:1

- EN1677-3.
- Safety Factor 4:1

Part Code	Size (mm)	Weight (kg)	WLL (T)	ø	E	E1	L1	L
XN737-06	6	0.5	1.12	21	30	28	110	141
XN737-07/8	7/8	0.88	2	25	30.4	35	136	175
XN737-10	10	1.58	3.15	34.5	48	45	168	214
XN737-13	13	3.0	5.3	40	54	52.5	207	268
XN737-16	16	5.9	8	50	47	63.3	254	332
XN737-20	18/20	7.0	12.5	64.5	54	86	274.5	332
XN737-22	22	12.3	15	70	60	76	319	415
XN737-26	26	20	21.2	80	101	96	362	472
XN737-32	32	44	31.5	105	101	133	470	614

Part Code	Size (mm)	Weight (kg)	WLL(T)	A	B	E	E1	L1	L1
XN739-06	6	0.44	1.12	8	32	30	28	96	131
XN739-07/8	7/8	0.8	2	9.5	38.5	29	35.8	119.3	161.8
XN739-10	10	1.38	3.15	12.5	46	48	45	142	195
XN739-13	13	2.81	5.3	15	59	54	52.5	179	249
XN739-16	16	6	8	18.5	77	48	63.3	224.8	210
XN739-20	18/20	7.25	12.5	25	77	53	86	238.3	335
XN739-22	22	12.8	15	25	97.5	60	76	277	392
XN739-26	26	21.8	21.2	30	118	98	96	321	450
XN739-32	32	49.6	31.5	35	150	99	135	416	589.6