
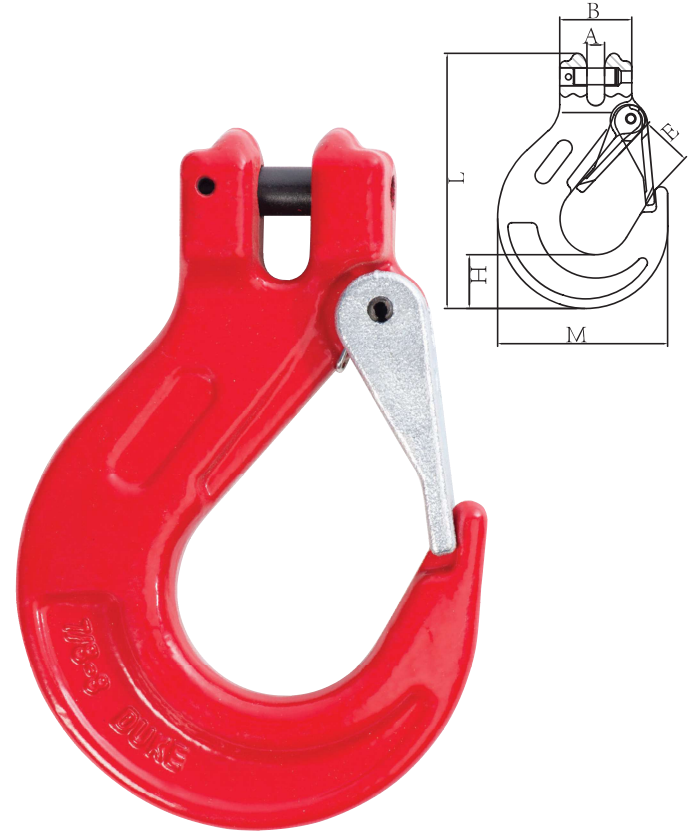


- Fatigue Rated x 1.5 WLL for 20,000 cycles
- Proof Tested - 2.5 times Working Load Limit
- 100% Magnaflux Crack Detected
- Super Alloy Steel
- All Load Pins are 100% individually inspected and tested

Grade 80 Chain Sling System

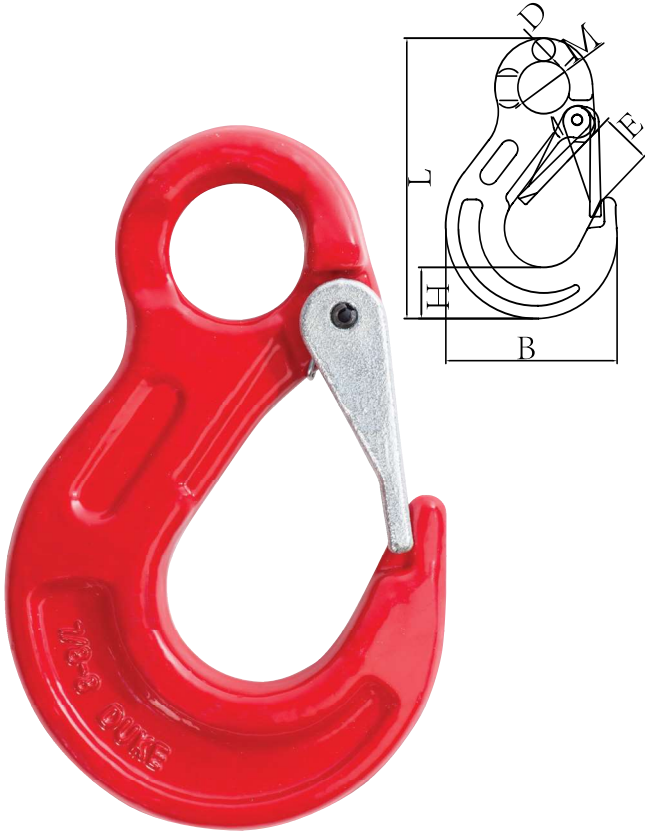

## XN334

Eye Sling Hook with Latch

## XN333

Clevis Sling Hook with Latch

- EN1677-2.
- Safety Factor 4:1

- EN1677-2.
- Safety Factor 4:1

Part Code	Size (mm)	Weight (kg)	WLL (T)	M	D	E	H	B	L
XN334-06	06	0.3	1.12	20.5	9	18.5	20	68	109
XN334-07/8	7/8	0.55	2	25	11	22	27	84	133.5
XN334-10	10	1.05	3.15	34	14	28	33	102.5	167.5
XN334-13	13	1.75	5.3	42.5	17.5	35	40	128.5	207.5
XN334-16	16	3.2	8	52	22	43	48	156.5	253
XN334-20	18/20	5.3	12.5	62	26	51.5	56	187	300

Part Code	Size (mm)	Weight (kg)	WLL (T)	A	B	E	H	M	L
XN333-06	06	0.3	1.12	7.5	32	19.5	20	68	108
XN333-07/8	7/8	0.55	2.0	9.5	38.5	24	25	85.5	131
XN333-10	10	0.96	3.15	13	48	28	36	106	163.5
XN333-13	13	1.52	5.3	16.5	55	34.5	41.6	130	196
XN333-16	16	3.43	8	18.5	65.5	43	46.2	155.5	236
XN333-20	18/20	6.73	12.5	25	92	51.5	51	180	181