


Alloy Bow Shackles

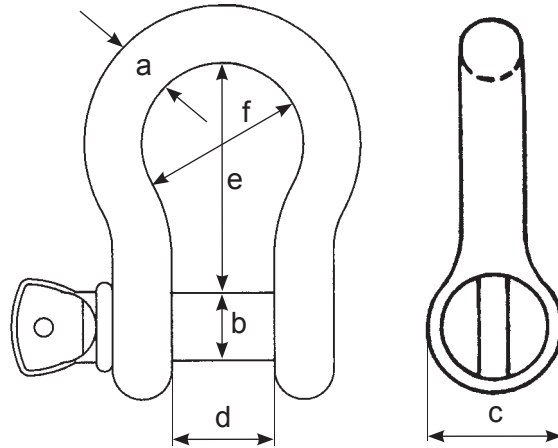

- Alloy bow shackles available with a screw type A pin
- Meets the performance requirements of US FED Specification RR-C-271 and EN-13889
- Nut & Bolt Shackles also available
- Green Pin (Van Beest) Shackles also supplied

Working Load Limit	Diameter Bow	Diameter Pin	Diameter Eye	Width Inside	Length Inside	Width Bow	Weight each
Tons	a mm	b mm	c mm	d mm	e mm	f mm	kg
0.33	5	6	14	9.5	22	15	0.03
0.5	6	8	16	12	29	20	0.05
0.75	8	10	19	13.5	31	21	0.09
1	10	11	23	17	37	26	0.14
1.5	11	13	27	19	43	29	0.17
2	13	16	30	20	48	33	0.33
3.25	16	19	38	27	60	43	0.62
4.75	19	22	46	32	71	50	1.07
6.5	22	25	53	36	84	58	1.64
8.5	25	28	61	43	95	68	2.28
9.5	28	32	68	46	108	74	3.36
12	32	35	76	51	119	82	4.31
13.5	35	38	84	57	133	92	6.14
17	38	42	92	60	146	98	7.81
25	45	50	106	73	177	127	12.61
35	50	57	119	83	197	138	18.33
55	65	70	145	105	260	185	37.90