


Polyester Slings

Webbing & Roundslings





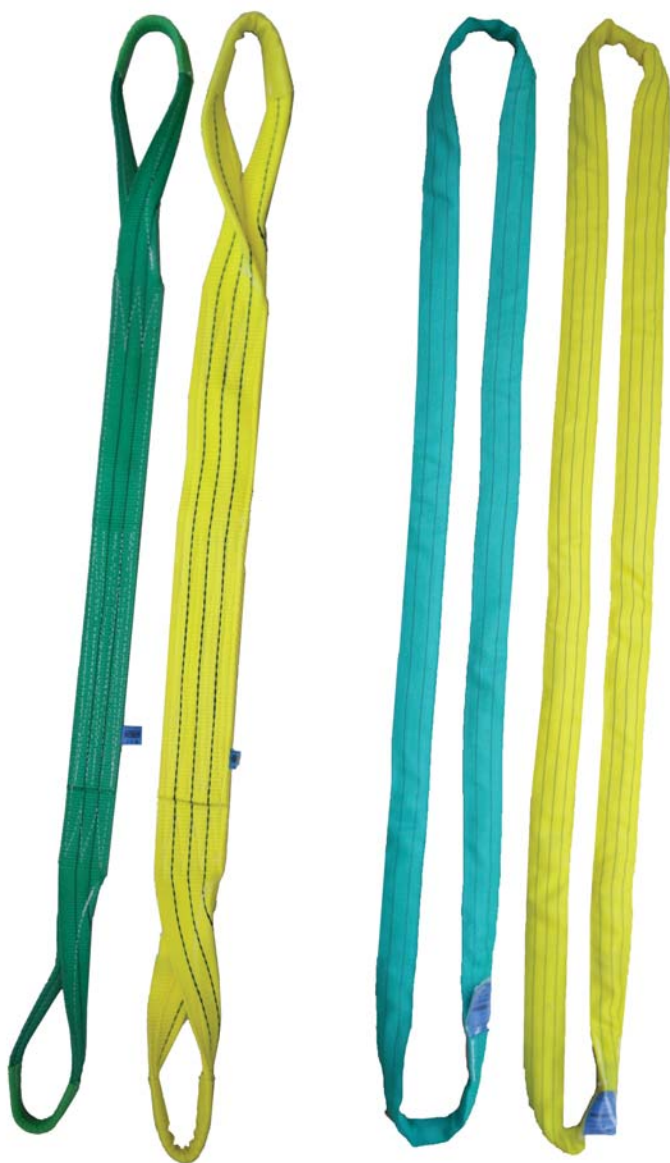


Webbing Slings

- Manufactured from high tenacity polyester material
- Available in various forms Duplex, Simplex & Endless
- Produced with a standard reinforced becket eye but other fittings can be sewn in during manufacture
- Working load limits available from 1 tonne to 100 tonnes
- 2, 3 & 4 leg slings also available.

Round Slings

- Manufactured from high tenacity polyester yarn
- Labelled with the relevant information for safety & traceability
- Lifts awkward shape loads
- Soft strong covering will not damage the surface of the material being lifted
- High Strength to weight ratio
- Complies to EN Standards

Webbing & Round Sling Capacities

Cap	Colour	Vertical x 1 	Choke x 0.8 	Basket 0° x 2 	Basket 0°-90° x 1.4 	Basket 120° x 1 
1t	VIOLET	1000	800	2000	1400	1000
2t	GREEN	2000	1600	4000	2800	2000
3t	YELLOW	3000	2400	6000	4200	3000
4t	GREY	4000	3200	8000	5600	4000
5t	RED	5000	4000	10000	7000	5000
6t	BROWN	6000	4800	12000	8400	6000
8t	BLUE	8000	6400	16000	11200	8000
10t	ORANGE	10000	8000	20000	14000	10000
12t	ORANGE	12000	9600	24000	16800	12000